

## Bullet 2MPX All in One Camera

### TECHNICAL SPECIFICATIONS FOR THE CAMERA

Image Sensor	2 MP CMOS image sensor
Signal System	PAL/NTSC
Effective Pixels	1920 (H) x 1080 (V)
Min. illumination	0,02 Lux@(F1.2, AGC ON), 0 Lux with IR
Shutter Time	1/25 (1/30) sto 1/50,000 s
Lens	2.8 mm
Horizontal Field of View	103° (2.8 mm)
Lens Mount	M12
Day & Night	IR cut filter
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 180°, Rotation: 0° to 360°
Synchronization	Internal synchronization
Video Frame Rate	PAL: 1080p@25fps NTSC: 1080p@30fps

### MENU

Image Mode	STD/HIGH-SAT
AGC	High/Medium/Low/Off
D/N Mode	Auto/Color/BW (Black and White)
BLC	Support
DWDR	Support
Language	English
Functions	Brightness, Sharpness, DNR, Mirror, Smart IR
AGC	High/Medium/Low/Off

### INTERFACE


Video Output	1 HD analog output
Switch Button	TVI/AHD/CVI/CVBS

### GENERAL

Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), Humidity: 90% or less (non-condensation)
Power Supply	12 VDC±15%
Power Consumption	Max. 4 W
Protection Level	IP66
Material	Plastic
IR Range	Up to 20 m
Dimensions	65.9 mm x 189.2 mm x 81.8 mm (2.59" x 7.45" x 3.22")
Weight	400 g (0.88 lb.)



### MODEL: LX2ABDL



CMOS Sensor



Night Vision



High Resolution




2.8mm Lens



Mega Pixel



Weatherproof IP66

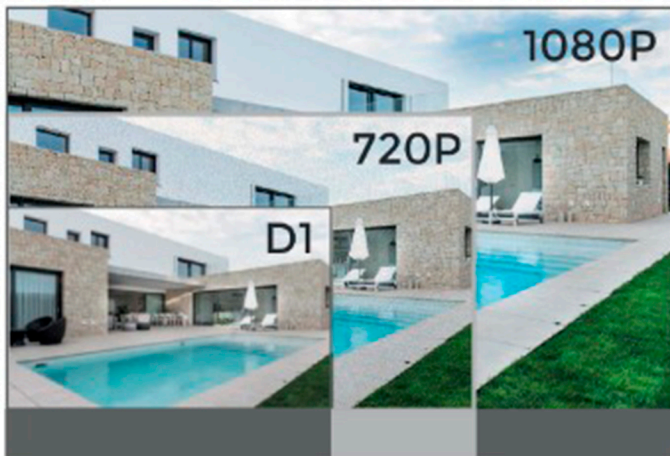

\*Reference image