

Dome 2MPX All in One Camera

TECHNICAL SPECIFICATIONS FOR THE CAMERA



Image Sensor	2 MP CMOS image sensor
Signal System	PAL/NTSC
Effective Pixels	1920(H) x 1080(V)
Min. illumination	0,02 Lux@(F1.2, AGC ON), 0 Lux with IR
Shutter Time	1/25 (1/30) sto 1/50,000 s
Lens	2.8 mm
Horizontal Field of View	103° (2.8 mm)
Lens Mount	M12
Day & Night	IR cut filter
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360°
Synchronization	Internal synchronization
Video Frame Rate	1080p@25fps/1080p@30fps
HD Video Output	1 analog HD output
S/N Ratio	>62dB

GENERAL

Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), Humidity: 90% or less (non-condensation)
Power Supply	12 VDC ± 15%
Power Consumption	Max. 4 W
Material	Plastic
IR Range	Up to 20 m
Dimensions	∅ 85.4 mm x 76.12 mm (∅ 3.38" x 2.67")
Weight	130 g (0.29 lb.)



MODEL: LX2ADDL

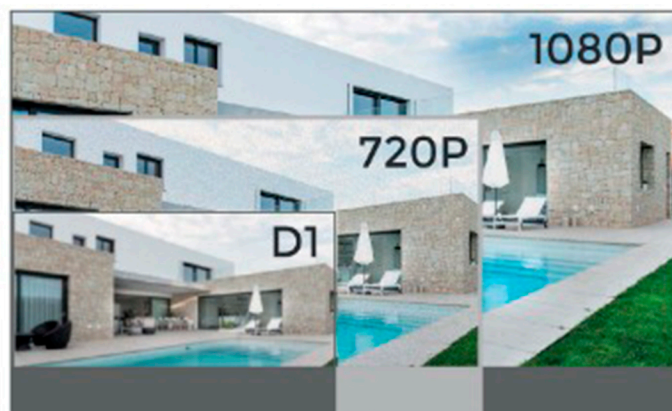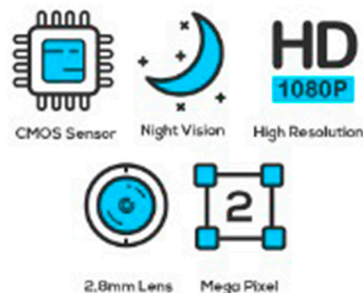

*Reference image