


## Video Intercom Kit

### TECHNICAL SPECIFICATIONS


Door Station/Video Parameters	Camera	1/4" CMOS
	Resolution	720 × 576
	Video Frame Rate	PAL: 25 fps
Door Station/Audio Parameters	Audio Input	Built-in Omnidirectional Microphone
	Audio output	Built-in Loudspeaker
	Audio quality	Noise Suppression and Echo Cancellation
Door Station/Light Supplement	Light Supplement Mode	Light Supplement Mode
Door Station/Device Interfaces	Four-Wire Interface	1 Four-Wire Interface (1-ch Video Input, 1-ch Audio Input/Output, 1-ch Power Supply, 1-ch Grounding)
	IO Output	1 Relay Output
Door Station/General	Material	Zinc Alloy
	Power Consumption	Max. 5W
	Working Temperature	-30° C to +70° C (-22° F to 158° F)
	Working Humidity	10% to 90%
Indoor Station/Display Parameters	Dimension (L X W X H)	145 mm × 49.2 mm × 26.45 mm (5.7" × 1.9" × 1.0")
	Display Screen	7-Inch Colorful TFT LCD
	Display Resolution	800 × 480
Indoor Station/Audio Parameters	Operation Method	Physical Button
	Audio Input	Built-in Omnidirectional Microphone
	Audio Output	Built-in Loudspeaker
Indoor Station/Device Interfaces	Audio Quality	Noise Suppression and Echo Cancellation
	Four-Wire Interface	4 Four-Wire Interfaces 1-ch Video Input, 1-ch Audio Input/Output, 1-ch Power Supply, 1-ch Grounding
	Power Supply	12 VDC
Indoor Station/General	Power Consumption	≤5 W
	Working Temperature	-10° C to + 55° C (14° F to 131° F)
	Working Humidity	10% to 90%
	Dimension (L X W X H)	195.8 mm × 132.8 mm × 18.39 mm (7.7" × 5.2" × 0.7")



### MODEL: LICK203M

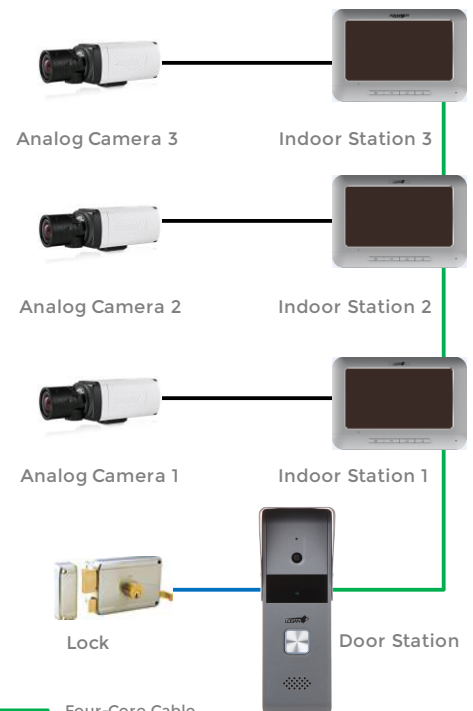

### Physical Interfaces

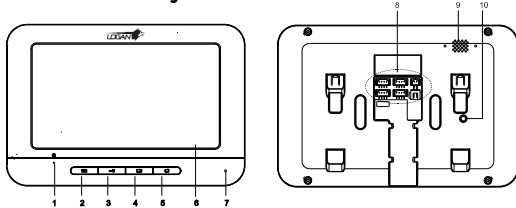

Index	Description	Index	Description
1	Power Supply Indicator	6	LCD Display Screen
2	Call Accept/ Decline Key	7	Microphone
3	Unlock Key	8	Terminals and Interfaces
4	Live View Key	9	Loudspeaker
5	Switch Key	10	Volume Control Knob