

4K Resolution 16CH PoE NVR

Specifications	
Video/Audio input	
Video compression	H.265/H.265+/H.264/H.264+/MPEG4
IP video input	16-ch
Incoming Bandwidth	160 Mbps
Outgoing Bandwidth	160 Mbps
Video/Audio output	
HDMI/VGA output	HDMI: 1-ch, Up to 4K (3840 × 2160) VGA: 1-ch, Up to 1920 × 1080/60Hz
Audio output	1-ch, RCA (Linear, 1 KΩ)
Decoding	
Recording resolution	8MP/6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/D CIF/2CIF /CIF/QCIF
Synchronous playback	16-ch
Capability	2-ch @8 MP(25fps) / 4-ch @4MP(30fps) / 8-ch @1080p(30fps)
Network management	
Network protocols	TCP/IP, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTPS
Hard disk	
SATA	2 SATA interfaces
Capacity	Up to 6TB capacity for each HDD
External interface	
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1kΩ)
Network interface	1 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
USB interface	Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0
Power Consumption	≤ 15 W (without enabling PoE)
Dimension (W x D xH)	385 × 315× 52 mm (15.2" × 12.4" × 2.0")



MODEL:LN6GNH



Motion Detection



Notification Alarm




Remote View



High Resolution



No Monthly Fees

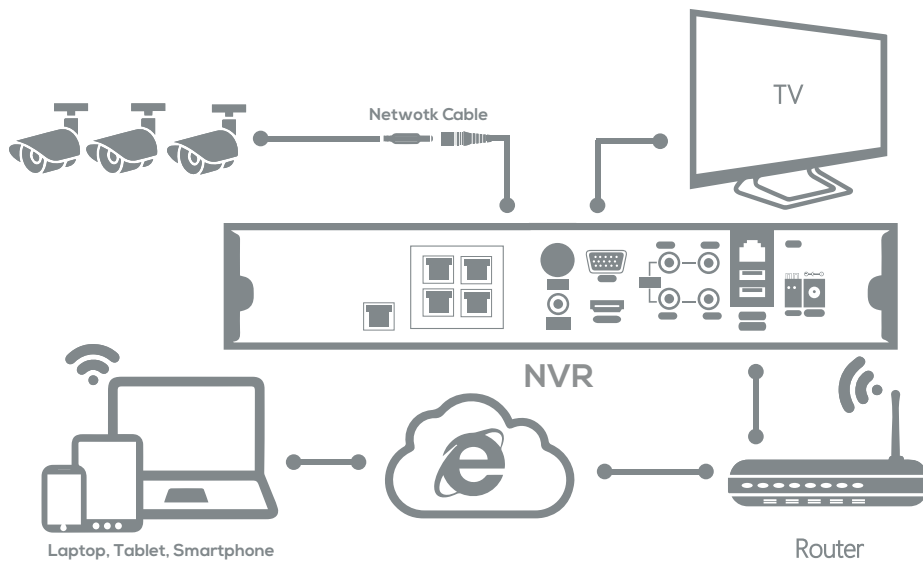

LOGAN CONNECT
FREE APP
Remote View

