




1080P All in One Hybrid 4 CH DVR

2 Bullet 2MPX All in One Cameras

TECHNICAL SPECIFICATIONS FOR THE CAMERA		
CAMERA		
Image Sensor	1/2,7" CMOS/1080P	
Camera Resolution	2 Megapixel	
Effective Pixels	1920(H) x 1080(V)	
Infrared LED	36 pcs	
Lens Mount	3,6mm	
Format	AHD/CVI/TVI/CBVS	
Operation Mode	UTC	
Video Output	1CH BNC	
Field of View	70° Degrees	
Minimum Illumination	0 LUX (IR on)	
IR Cut Filter	Yes (STARLIGHT)	
Night Vision Distance	82ft / 25m	
Shutter Speed	(1/60 sec-1/100,000 sec)	
Operative Temperature	14° ~ 122°F/ - 10° ~ 50°C	
Ingress Protection	IP66	
Power Supply	DC 12V/320mA (IR on)	

TECH	NICAL SPECIFICATIONS FOR DVR
	VIDEO
	DVR: 4CH 1080P
Video Input	Hybrid: 2CH 1080P + 2CH IP 1080P
	NVR: 4CH IP 1080P / 8CH IP 1080P / 4CH IP 3MPX
Video Output	VGA, HDMI
Display Resolution	Up to 1080P (1920 x 1080)
	DVR: 1/4 Screen
Display Split	Hybrid: 1/4 Screen
	NVR: 1/4/8/9 Screen
AUDIO	
Audio Input	4 Channel RCA
Audio Output	1 Channel RCA
	RECORDING
Record Quality	Up to 1080P // NVR Up to 3MPX
Video Compression	H.264 (High Profile)
Record Mode	Manual / Schedule / Motion / Alarms
	PLAYBACK
Simultaneously Playback	1/2 Channels
Backup Mode	USB Device, Web Browser, Mobile App
Playback Quality	Up to 1080P (1920 x 1080)
	STORAGE
HDD Port	1 SATA Port
HDD Capacity	Up to 4TB
EXTERNAL PORTS	
USB Port	2 Ports, USB 2.0
RS485	1 Port for PTZ Control
Ethernet	1 RJ-45 Port (10/100Mbps)
	GENERAL
Power Supply	DC 12V/3A
Video System	NTSC/PAL Switch Selectable
Remote Access	Cloud System For Remote Access, NO Port Mapping
Compatibility For	iOS, Android
Compatible Video Format	ALID /TVII /CVII /CDV/C

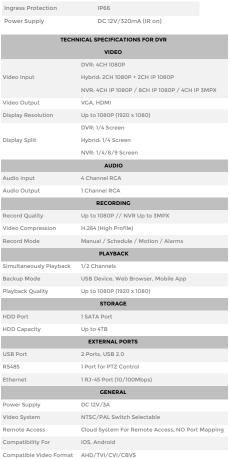



High Quality HD All in One Cameras

Ideal suited for small business, factories and home. You can watch rooms, babies pets, elders with sharp HD video and clear voice sound.





MODEL: LX422BN-01













Motion

Detection

